

Contactless reader CANCrocodile

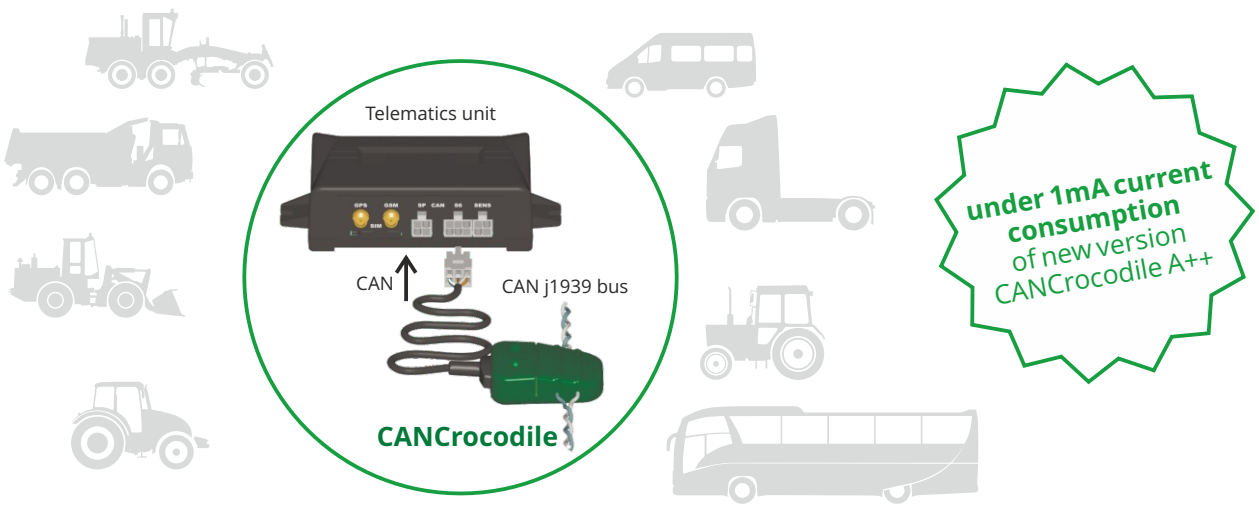

under 1mA current consumption of new version CANCrocodile A++

CANCrocodile is used in vehicle telematics and GPS tracking system for safe contactless data gathering from automotive buses T-CAN and M-CAN.

- ✔ CAN j1939 bus data reading with no damage to wire insulation.
- ✔ Protecting vehicle electronic systems against active requests from telematics unit.
- ✔ Saving warranty for a vehicle.

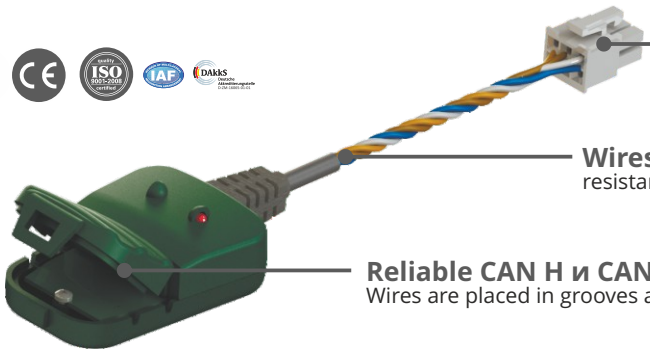


Power-supplied by vehicle
directly from 12/24V electrical network of vehicle, without additional adapters.

Wires meet automotive standards
resistant to breaks and temperature fluctuations

Reliable CAN H и CAN L wire fastening
Wires are placed in grooves and firmly pressed to reading surface by elastic pad

Easy installation - no special tools needed.

1. Open CANCrocodile case.
2. Put CAN H and CAN L wires along the marks on reading surface.
3. Close the case until click and connect CANCrocodile wires to telematics unit's CAN-port and electrical network of vehicle.

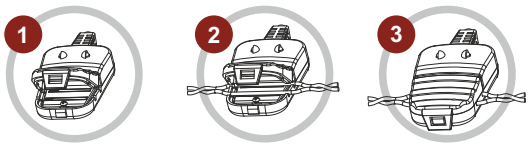

Models:

CAN CROCODILE **U12/24** **L0.7** **CS**

U – power supply voltage:
- **12/24** – 12/24 V, basic version
- **12/24 A++** – 12/24 V, current consumption in sleep mode is 1/0,5 mA
- **5** – 5V

L – output cable length
- **0.7** – 0,7m, basic version
- **2** – 2,0 m

C – output cable ending:
- **S** – connector, basic version
- **W** – bare wires
- **C** – crimped wires

phone +375 17 240 39 73
Telegram/ Viber/ WhatsApp +375 44 792 67 58
e-mail: sales@technoton.by
www.jv-technoton.com

TECHNOTON
ADVANCED VEHICLE TELEMATICS

06/18
eng/CANCrocodile/leaflet/2.0